
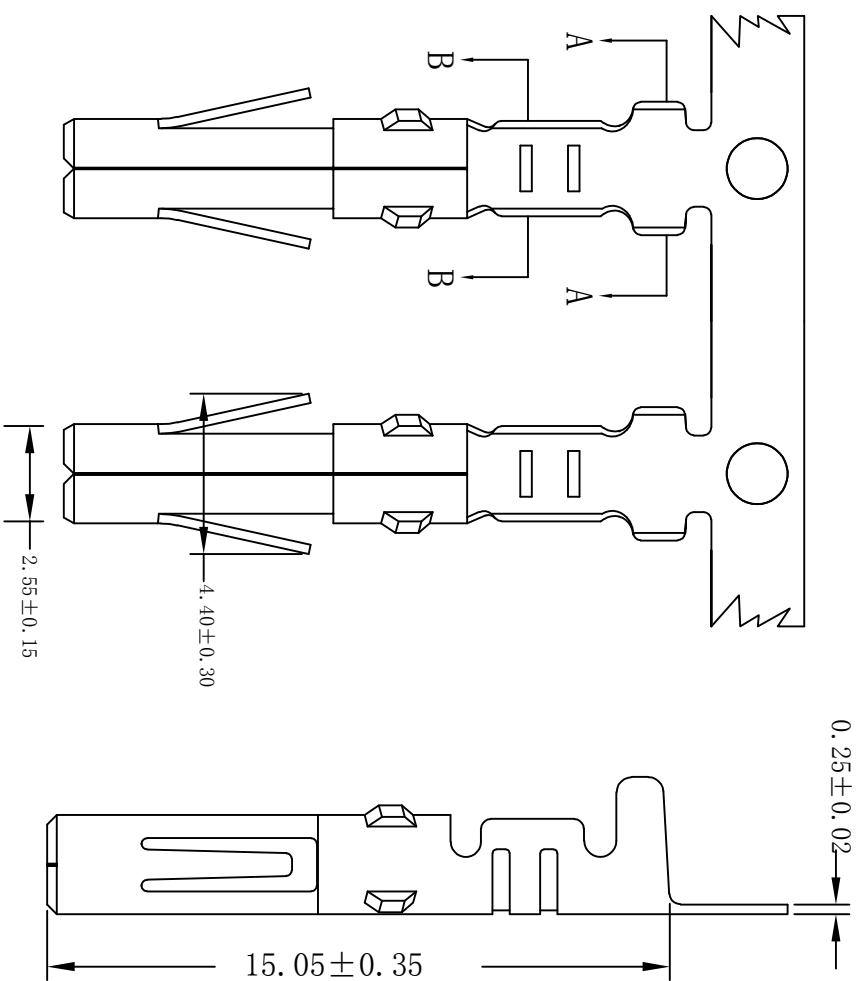


EST5081 T P X - 2 X-X

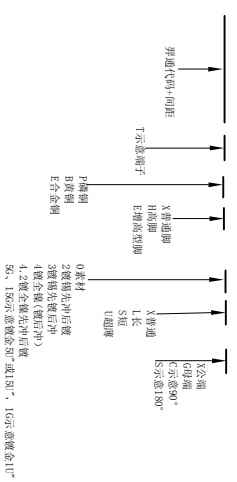

SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 15A AC/DC;
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃ ~ +85℃
- Contact resistance: 10mΩ Max
- Material: Brass
- Q' TY: 7000PCS/Reel
- Applicable wire: AWG#18~AWG#24

			料号PART NO: EST5081TBX-2Y-G			GENERAL
			品名 TITLE: 大4P母 (低脚)			
			材料:	单位: MM	包装规格:	
			制图:	审核:	比例: 1:1	
					日期: 2019.4.30	
日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY			



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST5081TBX-2X-G

品名 TITLE: 大4P母 (低脚)

材料:	单位:	包装规格:
-----	-----	-------

制图:	审核:	批准:	日期:
-----	-----	-----	-----

9

5

4

3

2

1

 κ_T