

13790510059




5

4


3

2


1

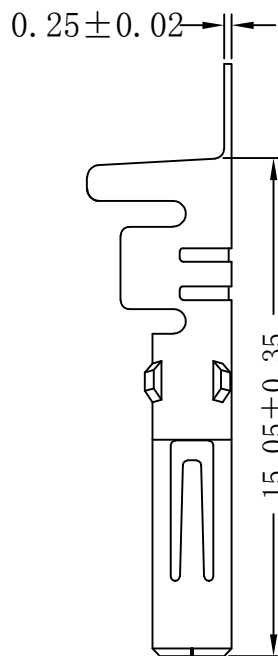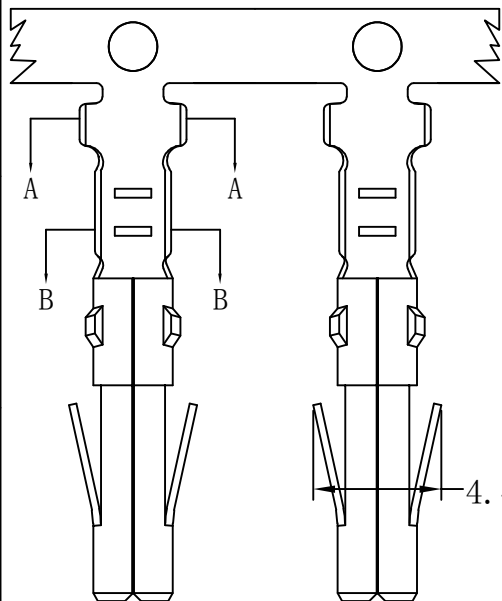

Section:A-A



Section:B-B



Section:C-C

EST5081 T P X - 2 X - X

↑
异通代码+间距↑
T示意端子↑
X普通脚
H高脚
E增高型脚↑
X普通
L长
S短
U超薄↑
X公端
G母端
C示意90°
S示意180°P磷铜
B黄铜
E合金铜0素材
2镀锡先冲后镀
3镀锡先镀后冲
4镀全镍(镀后冲)
4.2镀全镍先冲后镀
5G、15G示意镀金50"或150", 16示意镀金1U"

SPECIFICATIONS

- Voltage rating:250V AC/DC;
- Current rating:15A AC/DC;
- Withstanding Voltage:1500V AC/minute
- Insulatin resistance:1000MΩ Min
- Temperature range:-25℃~+85℃
- Contact resistance:10mΩ Max
- Material:Brass
- Q' TY:5500PCS/Reel
- Applicable wire:AWG#18~AWG#22

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST5081TBH-2X-G

品名 TITLE: 大4P母(高脚)

材料:

单位: MM

包装规格:


比例: 1:1

制图:

审核:

核准:

日期: 2019. 4. 30

一般公差
GENERAL TOLERANCE
X. X ±0.25
X. XX ±0.20
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

6

5

4

3

2

1

KT