

13790510059


5

4

3

2

1

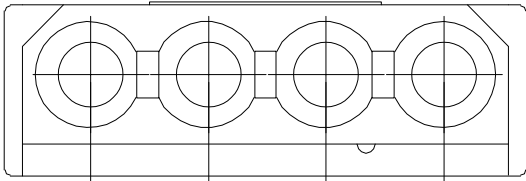


5.08±0.20

3.80±0.30

*

23.30±0.40

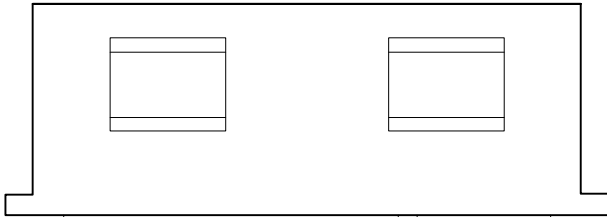


1

2

3

4

21.17±0.25

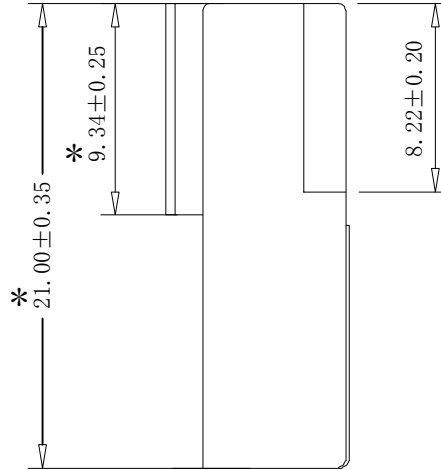

*

21.00±0.35

*

9.34±0.25

8.22±0.20

EST5081 H - 1*4P X - B - X - HF-NK - X

↑
羿通代码+间距

↑
X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明

PIN数

1示意单排
2示意双排

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

↑
X公胶壳
G母胶壳

↑
NO MARK

↑
A灼热丝750
B灼热丝850
X普通料

↑
HF示意无卤
NF普通含卤

- SPECIFICATIONS
- Voltage rating:250V AC/DC;
 - Current rating:15A AC/DC;
 - Withstanding Voltage:1500V AC/minute
 - Insulatin resistance:1000MΩ Min
 - Temperature range:-25℃~+85℃
 - Contact resistance:10mΩ Max
 - Poles:2-4P
 - Material:PA66 UL94-V0
 - Q' TY:1000PCS/Bag
 - Applicable wire:AWG#16~AWG#24
 - Pitch:5.08mm



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST5081H-1*4PB-X

品名 TITLE: 大4P-H母

材料:

单位:

MM

包装规格:

比例:

1:1

制图:

审核:

核准:

日期:

2022. 9. 12

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.25
ANGLE ±1°



日期版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

6

5

4

3

2

1

KT