

13790510059


5

4

3

2


1

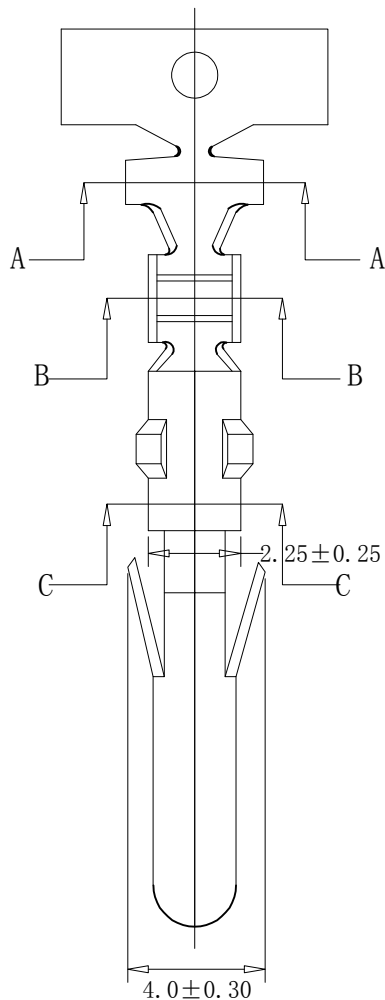


17.5 ± 0.35

12.3 ± 0.30


Φ 2.0 ± 0.20



A--A



B--B



C--C

EST5081 T P X - 2 X- X

↑
异通代码+间距↑
T示意端子↑
X普通脚
H高脚
E增高型脚↑
X普通
L长
S短
U超薄↑
X公端
G母端
C示意90°
S示意180°P磷铜
B黄铜
E合金铜0素材
2镀锡先冲后镀
3镀锡先镀后冲
4镀全镍(镀后冲)
4.2镀全镍先冲后镀
5G、15G示意镀金5U°或15U°, 16示意镀金1U°

SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 15A AC/DC;
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25°C ~ +85°C
- Contact resistance: 10mΩ Max
- Material: Brass
- Q' TY: 7000PCS/Reel
- Applicable wire: AWG#18~AWG#22



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST5081TPX-2X-X

品名 TITLE: 大4P-T公

材料:

单位: MM

包装规格:

比例: 1:1

制图:


审核:

核准:

日期: 2022. 9. 12

日期版次
REVISION日期
DATE变更内容
DESCRIPTION核 准
APPROVALBY

一般公差
GENERAL TOLERANCE
X. X ± 0.25
X. XX ± 0.20
ANGLE ± 1°



6

5

4

3

2

1

KT