




SINGLE CONTACT TYPE

Pos.	Dim. A	Dim. B	Dim. C	Dim. D
8	14.86	8.89	7.62	14.66
10	17.40	11.43	10.16	17.20
12	19.94	13.97	12.70	19.74
14	22.48	16.51	15.24	22.28
16	25.02	19.05	17.78	24.82
18	27.56	21.59	20.32	27.36
20	30.10	24.13	22.86	29.90
22	32.64	26.67	25.4	32.44
24	35.18	29.21	27.94	34.98
26	37.72	31.75	30.48	37.52
28	40.26	34.29	33.02	40.06
30	42.80	36.83	35.56	42.60
32	45.34	39.37	38.10	45.14
34	47.88	41.91	40.64	47.68
36	50.42	44.45	43.18	50.22
40	55.50	49.53	48.26	55.30
44	60.58	54.61	53.34	60.38
50	68.20	62.23	60.96	68.40
60	80.90	74.93	73.66	80.70
64	85.98	80.01	78.74	85.78

Material:
Insulator: PBT+Glass Fiber (UL94V-0).
Contact: Copper Alloy.
Contact Plated: Gold 10U" over Nickel 50U" Plated.
Specification:
Current Rating: 1 Amp.
Withstanding Voltage: AC 500V for 1 Minute.
Insulation Resistance: 100M Ohm Min. at DC 500V.
Contact Resistance: 1 Ohm Min..
Operating Temperature: -20°C ~ +105°C.
Repeated Insertion/Withdrawal: ≥250 cycles

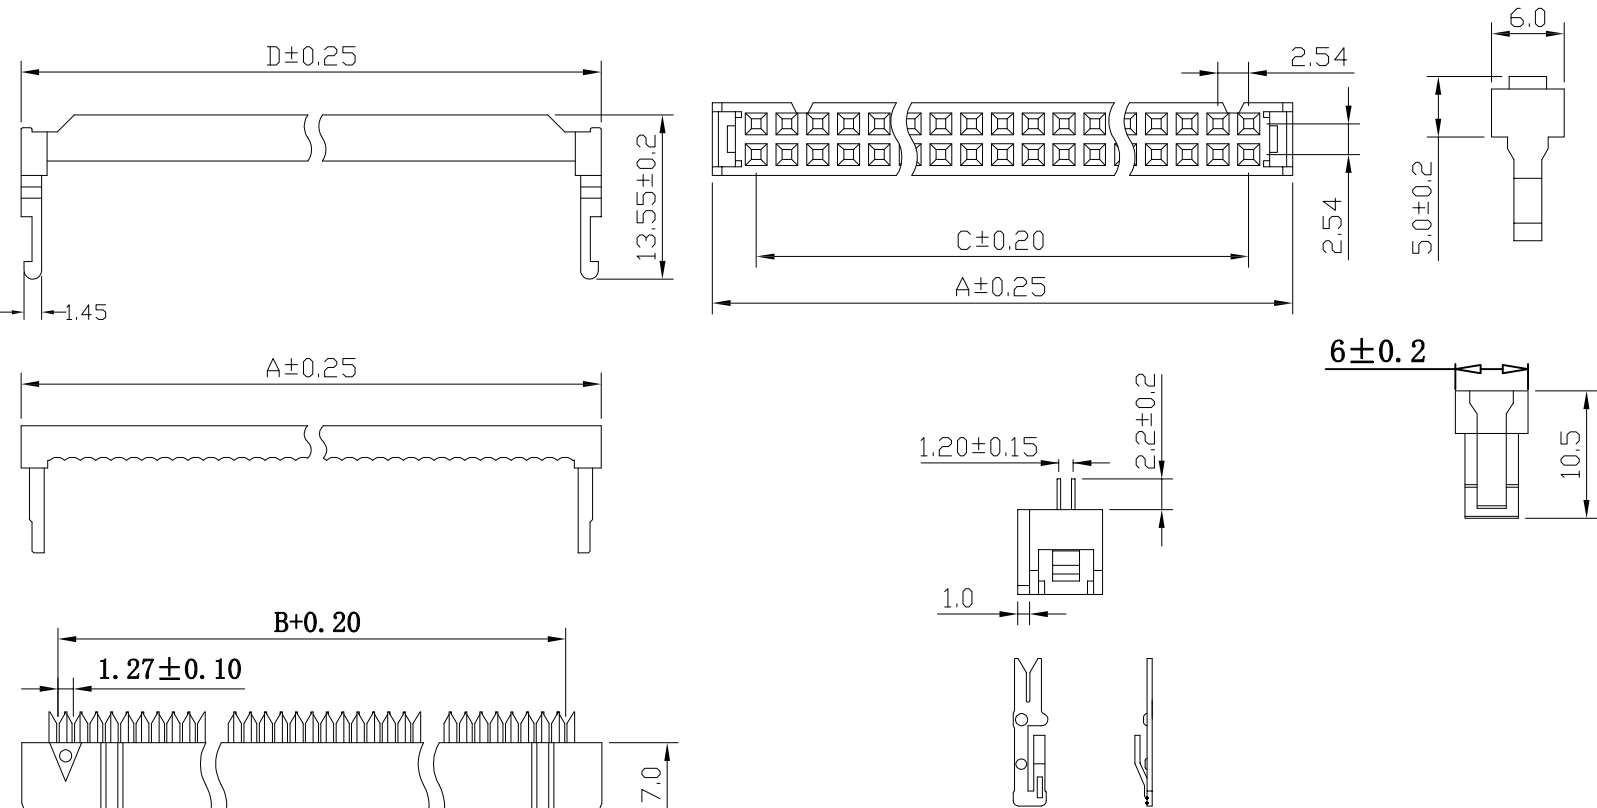

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

				料号PART NO:	一般公差 GENERAL TOLERANCE		
				品名 TITLE: 2.54-1 IDC	X. X ±0.30		
				材料:	单位: MM	包装规格:	X. XX ±0.20
				制图:	审核:	核准:	ANGLE ±1°
版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	比例: 1:1	日期: 2025. 2. 28		