



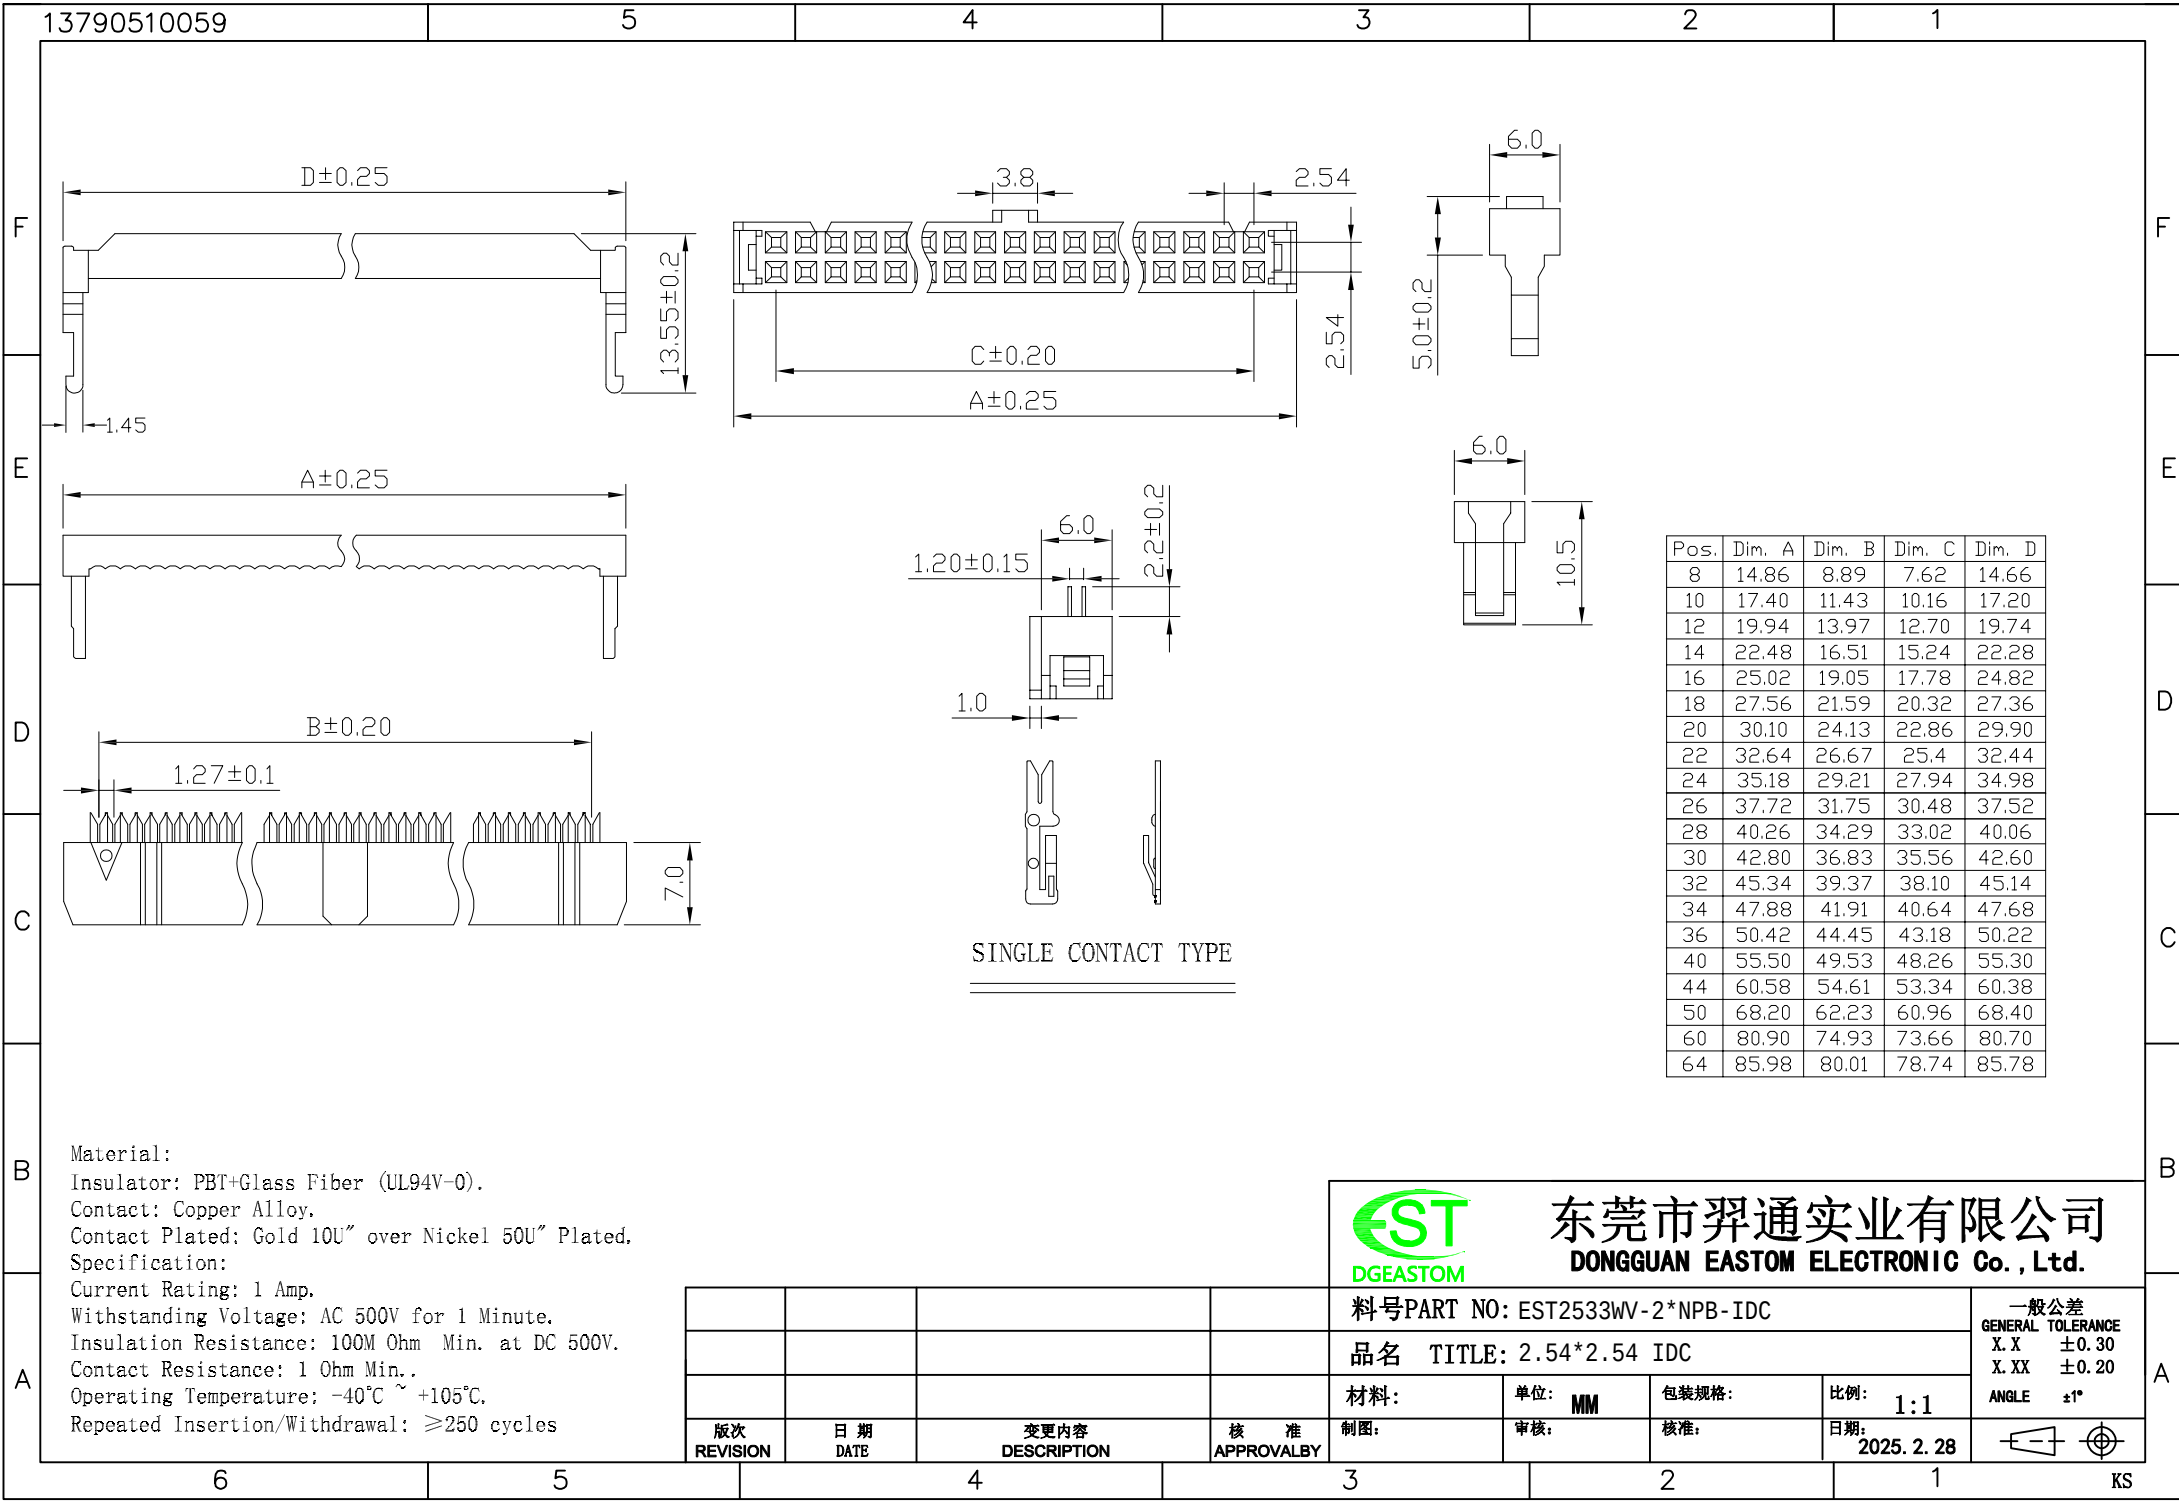

Material:
Insulator: PBT+Glass Fiber (UL94V-0).
Contact: Copper Alloy.
Contact Plated: Gold 10U" over Nickel 50U" Plated.
Specification:
Current Rating: 1 Amp.
Withstanding Voltage: AC 500V for 1 Minute.
Insulation Resistance: 100M Ohm Min. at DC 500V.
Contact Resistance: 1 Ohm Min..
Operating Temperature: -40°C ~ +105°C.
Repeated Insertion/Withdrawal: ≥250 cycles



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2533WV-2*NPB-IDC				一般公差 GENERAL TOLERANCE X.X ±0.30 X.XX ±0.20 ANGLE ±1°
品名 TITLE: 2.54*2.54 IDC				
材料:	单位: MM	包装规格:	比例: 1:1	
制图:	审核:	核准:	日期: 2025. 2. 28	
版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	

6

5

4

3

2

1

KS