

13790510059





5

4

3

2

1

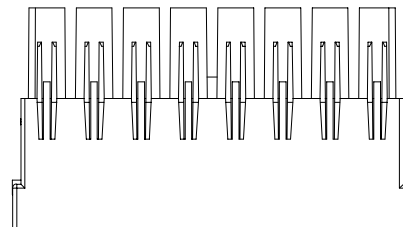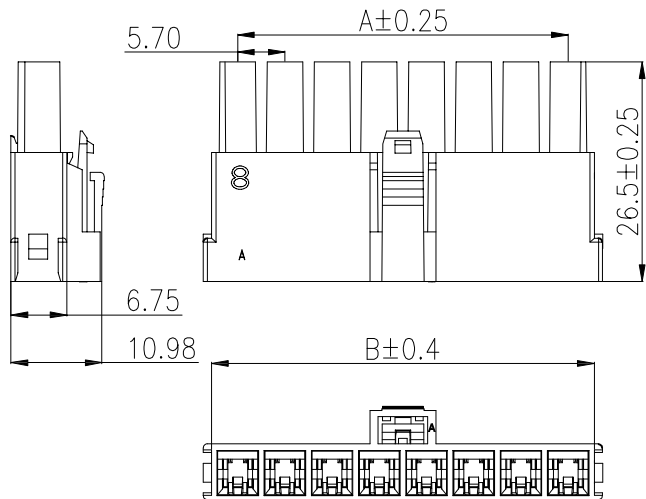

Current rating: With tinned AWG copper wire(Only for reference)

Wire size		N			
AWG	Max. Ins. Dia.	2	3	4	5~8
#12, 4.0mm ²	.162"(4.11mm)	25	24	23	18
#14, 2.5mm ²	.148"(3.75mm)	21	17	15	13
#16, 1.5mm ²	.125"(3.18mm)	17	15	13	12

PIN	A	B
2	5.70	12.05
3	11.40	17.75
4	17.10	23.45
5	22.80	29.15
6	28.50	34.85
7	34.20	40.55
8	39.90	46.25

EST5700 H - 1*NP X - B - X - HF-NK - X

↑ 羿通代码+间距

↑ PIN数
1示意单排
2示意双排

↑ X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明

↑ X普通
B带扣
C刺破
2L示意两侧带锁扣
U超薄F防呆型
HV带高凸点,
LC带低凸点,
K卡槽
E有耳

↑ X公胶壳
G母胶壳

↑ NO MARK
A灼热丝750
B灼热丝850
X普通料

↑ HF示意无卤
NF普通含卤

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

- SPECIFICATIONS
- Voltage rating: 600V AC/DC;
 - Current rating: 23A AC/DC;
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ Min
 - Temperature range: -40℃~+105℃
 - Contact resistance: 10mΩ Max
 - Poles: 2-4P
 - Material: PA66 UL94-V0 or 94V-2 Black
 - Q'TY: 1000PCS/Bag
 - Applicable wire: AWG#16~AWG#24



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST5700H-1*4PB-B-X

品名 TITLE: 5.7-H公

材料:

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2022. 10. 18

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.25
ANGLE ±1°



TAS