

13790510059

5

4

3



2

1







13.00

1.50


0.30±0.02



高脚12AWG

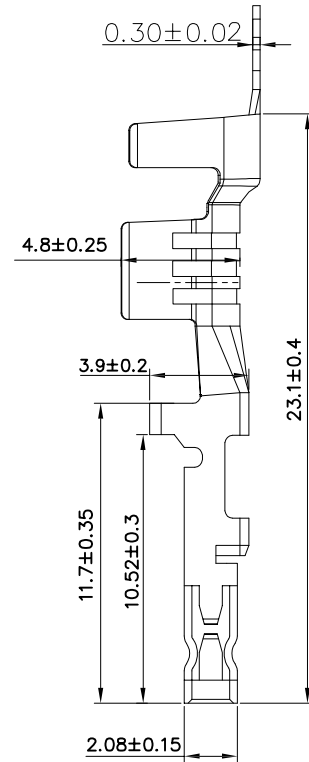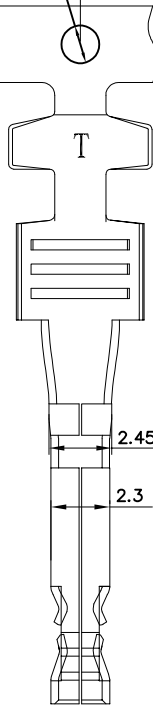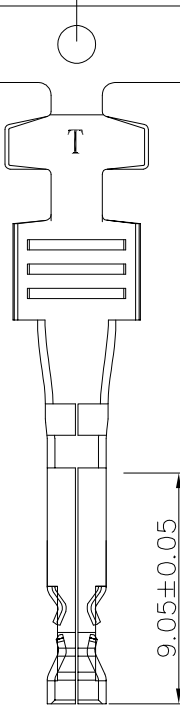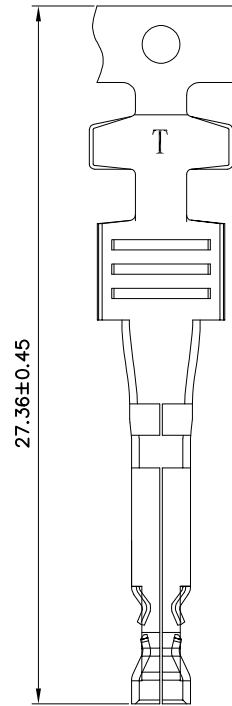

低脚14-16AWG

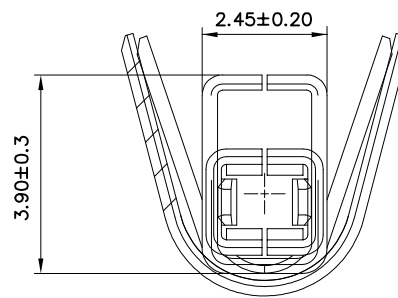

2:1

EST5700 T P X - 2 X - G

弄通代码+间距

T示意端子

X普通脚
H高脚
E增高型脚P磷铜
B黄铜
E合金铜X普通
L长
S短
U超薄0素材
2镀锡先冲后镀
3镀锡先镀后冲
4镀全银(镀后冲)
4.2镀全银先冲后镀
5G、15G示意镀金5U"或15U", 1G示意镀金1U"X公端
G母端
C示意90°
S示意180°

- SPECIFICATIONS
- Voltage rating: 600V AC/DC;
 - Current rating: 23A AC/DC;
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ Min
 - Temperature range: -25℃~+85℃
 - Contact resistance: 10mΩ Max
 - Poles: 2-4P
 - Material: C181400
 - Q' TY: 2500PCS/Reel
 - Applicable wire:



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST5700TPX-2X-G

品名 TITLE: 5.7-T

材料:

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2022. 10. 18

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.25
ANGLE ±1°

日期版次
REVISION日期
DATE变更内容
DESCRIPTION核准
APPROVALBY

6

5

4

3

2

1

TAS