

13790510059



5

4


3

2


1

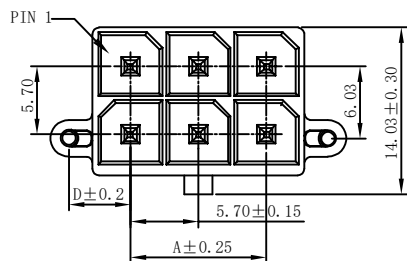

2 PIN




12 PIN

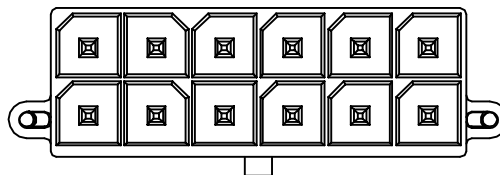



CURRENT rating:with tinned AWG copper wire

Wire size		N			
AWG	Max. Ins. Dia.	2	4	6	8~12
#12 • 4.0mm ²	.162" (4.11mm)	23	20	18	16
#14 • 2.5mm ²	.148" (3.75mm)	21	17	15	13
#16 • 1.5mm ²	.125" (3.18mm)	17	15	13	12

4 PIN




10 PIN

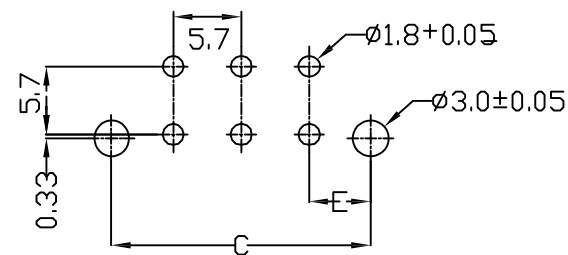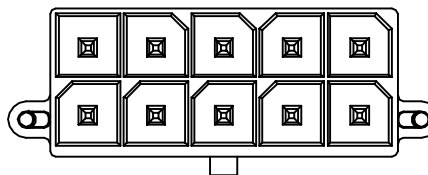


P.C. board layout

6 PIN



8 PIN

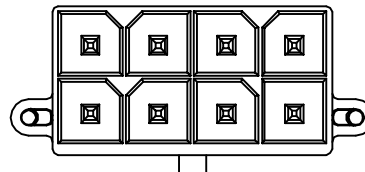

Dimensional information (mm)

Circuits	2	N
A	N/A	2.85XN-5.7
B	8.35	2.85XN+0.65
C	12.34	2.85XN+4.65
D	7.7	6.7
E	6.17	5.17

&& N = 4 ~ 12

SPECIFICATIONS

- Voltage rating: 600V AC/DC;
- Current rating: 23A AC/DC;
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -20℃ ~ +85℃
- Contact resistance: 30mΩ Max
- Poles: 2-12P
- Material: 1. SHEEL (LCP Black) ; 2. PIN (HIGH C ONTACTIVITY COPPER ALLOY
- Q' TY: 1000PCS/Bag



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST5700WV-2*NPB-B

品名 TITLE: 5.7-Wafer直针(双排)

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2022.12.06

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.25
ANGLE ±1°

版次
REVISION

日期
DATE

变更内容
DESCRIPTION

核准
APPROVALBY

6

5

4

3

2

1

TAS