

13790510059








5

4

3

2

1

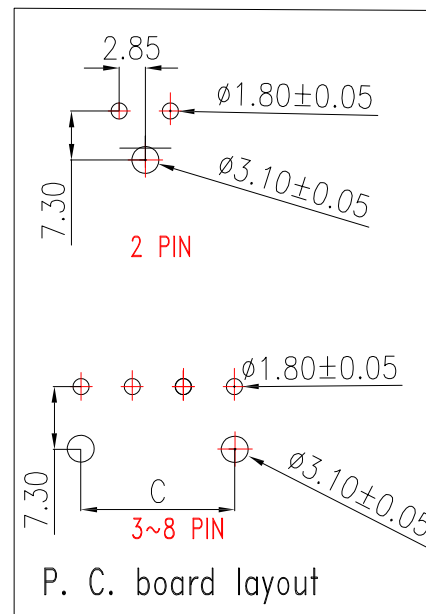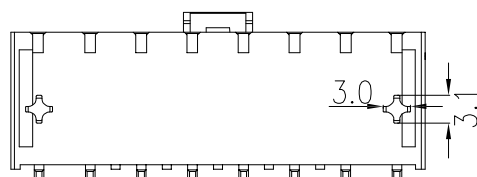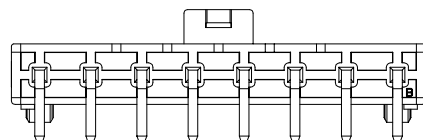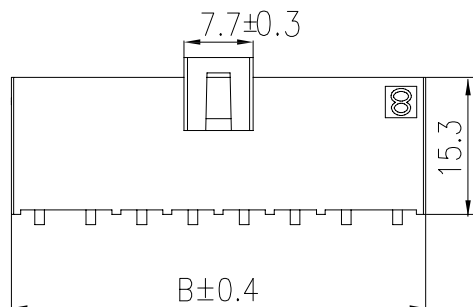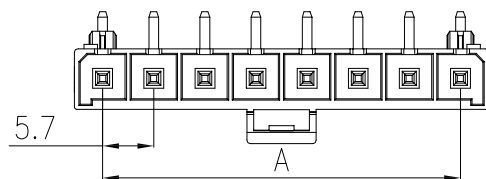

Dimensional Information (mm)

Circuits	2	N
Dim. A	5.70	5.7xN-5.7
Dim. B	12.05	5.7xN+0.65
Dim. C	N/A	5.7x(N-1)

&& N = 4 ~ 12

EST5700W	V	-1*NP	X	-	X	X	-	NK	-HF
↑ 异通代码+间距		↑ PIN数	↑ X本色 B黑色 R红色 L蓝色 Y黄色 G绿色	↑ X普通 B带扣 U超薄 PH组合排针 PH组合排母 H高弯 K打脚型 D防呆型 2示意有柱 LO带定位无K KLO带定位打K		↑ C为pPIN针镀金 S为pPIN针镀锡		↑ NK为NO MARK NK为有MARK	↑ HF无滴 NF普通含滴
	↑ V示意180°直针, VS立式 R示意90°弯针, RS卧式 RG高弯°						↑ 1为PbS, 2为PbT, 3为LCP, 4为ABS, 5为pM 6为PA66		
	↑ W示意针座 W后为0默认材质为V0 W后带2示意V2								

SPECIFICATIONS

- Voltage rating: 600V AC/DC;
- Current rating: 23A AC/DC;
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -20℃ ~ +85℃
- Contact resistance: 10mΩ Max
- Poles: 2-4P
- Material: LCP UL94-V0
- PIN: High contactivity copper alloy and tin-plated
- Q' TY: 1000PCS/Bag
- Applicable wire:



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST5700WR-1*4PB-B

品名 TITLE: 5.7弯针(单排)

材料:

单位: MM

包装规格:

比例: 1:1

制图:


审核:

核准:

日期: 2023. 11. 20

日期版次
REVISION日期
DATE变更内容
DESCRIPTION核准
APPROVALBY

一般公差
GENERAL TOLERANCE
X. X ±0.35
X. XX ±0.25
ANGLE ±1°



TAS