

13790510059

5


4

3



2

1






10 CKTS

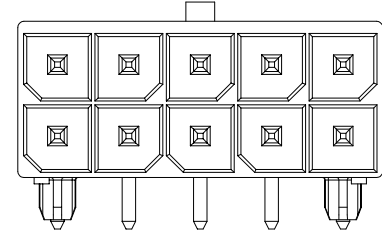


12 CKTS

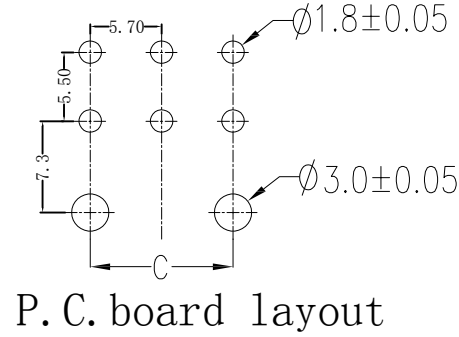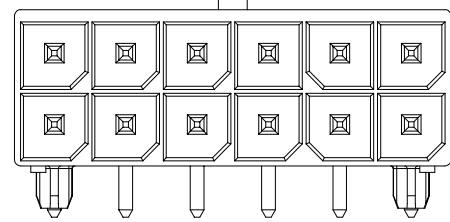


P.C. board layout

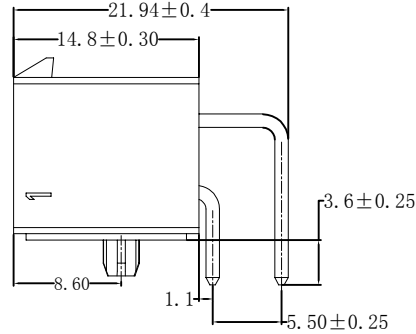


2 CKTS




4 CKTS



6 CKTS



8CKTS



EST5700W R -1*NP X - X - X X - NK-HF

↑ 羿通代码+间距

↑ PIN数 X本色
1单排 B黑色
2双排 R红色
L蓝色
Y黄色
G绿色

↑ X普通
B带扣
U超薄
PH组合排针
FH组合排母
H高弯
K打脚
D防呆型
2示意有柱
LO带定位无K
KLO带定位打K

↑ G为PIN针镀金
S为PIN针镀锡

↑ NK为NO MARK
MK为有MARK

↑ 1为PPS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T, 6为PA66

↑ HF无卤
NF普通含卤

W示意针座
W后无0默认材质为V0
W后带2示意V2

Current rating: With tinned AWG copper wire

Wire size		N			
AWG	Max. Ins. Dia.	2	4	6	8~12
#12 • 4.0mm ²	.162" (4.11mm)	23	20	18	16
#14 • 2.5mm ²	.148" (3.75mm)	21	17	15	13
#16 • 1.5mm ²	.125" (3.18mm)	17	15	13	12

Circuits	2	4	N
Dim. A	N/A	2.85xN-5.7	
Dim. B	8.35	2.85xN+0.65	
Dim. C	N/A	2.85xN-5.7	

&& N = 6 ~ 12

- SPECIFICATIONS
- Voltage rating: 600V AC/DC;
 - Current rating: 23A AC/DC;
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ Min
 - Temperature range: -20℃~+85℃
 - Contact resistance: 10mΩ Max
 - Poles: 2~4P
 - Material: LCP UL94-V0 Black

PIN: High contactivity copper alloy and tin-plated

- Q' TY: 1000PCS/Bag
- Applicable wire:



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST5700WR-2*4PB-B

品名 TITLE: 5.7弯针(双排)

材料:

单位: MM

包装规格:

比例: 1:1

制图:


审核:

核准:

日期: 2022. 12. 06

日期版次
REVISION日期
DATE变更内容
DESCRIPTION核 准
APPROVAL BY

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.25
ANGLE ±1°



TAS