



4 CKTS

10 CKTS

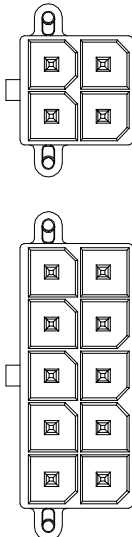

6 CKTS


8 CKTS

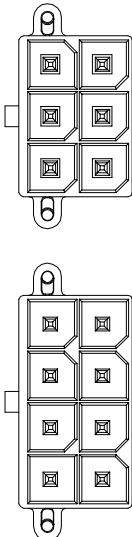

Dimensional Information (mm)

Circuits	2	N
Dim. A	N/A	2.85xN-5.7
Dim. B	8.35	2.85xN+0.65
Dim. C	12.34	2.85xN+4.64
Dim. D	7.7	6.7
Dim. E	6.17	5.17


&& N = 4 ~ 12



CURRENT rating: with tinned AWG copper wire

Wire size			N			
AWG	Max. Ins. Dia.	2	4	6	8~12	
#12, 4.0mm ²	.162" (4.1mm)	23	20	18	16	
#14, 2.5mm ²	.148" (3.75mm)	21	17	15	13	
#16, 1.5mm ²	.125" (3.18mm)	17	15	13	12	

P.C. board layout

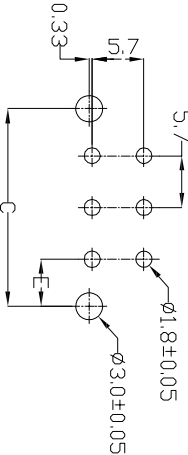

SPECIFICATIONS

- Voltage rating: 600V AC/DC;
- Current rating: 23A AC/DC;
- Withstanding Voltage: 1500V AC/minute
- Insulating resistance: 1000MΩ Min
- Temperature range: -20℃~+85℃
- Contact resistance: 10mΩ Max
- Poles: 2~4P
- Material: LCP UL94-V0 or 94V-2 Black
- VTY: 1000PCS/Bag
- Applicable wire:



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO.: EST5700WV-2*4PB-B

品名 TITLE: 5.7直针(双排)

材料:

单位:

包装规格:

比例:

1:1

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.25
ANGLE ±1°

日期版次
REVISION

日期
DATE

变更内容
DESCRIPTION

核准
APPROVALBY

审核:

核准:

日期:

2022.12.06

