





- SPECIFICATIONS
- Voltage rating: 600V AC/DC;
 - Current rating: 9A AC/DC;
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ Min
 - Temperature range: -25℃~+85℃
 - Contact resistance: 20mΩ Max
 - Poles: 2x1p-2x12P
 - Material: PA66 UL94-V2
 - Q' TY: 1000PCS/Bag

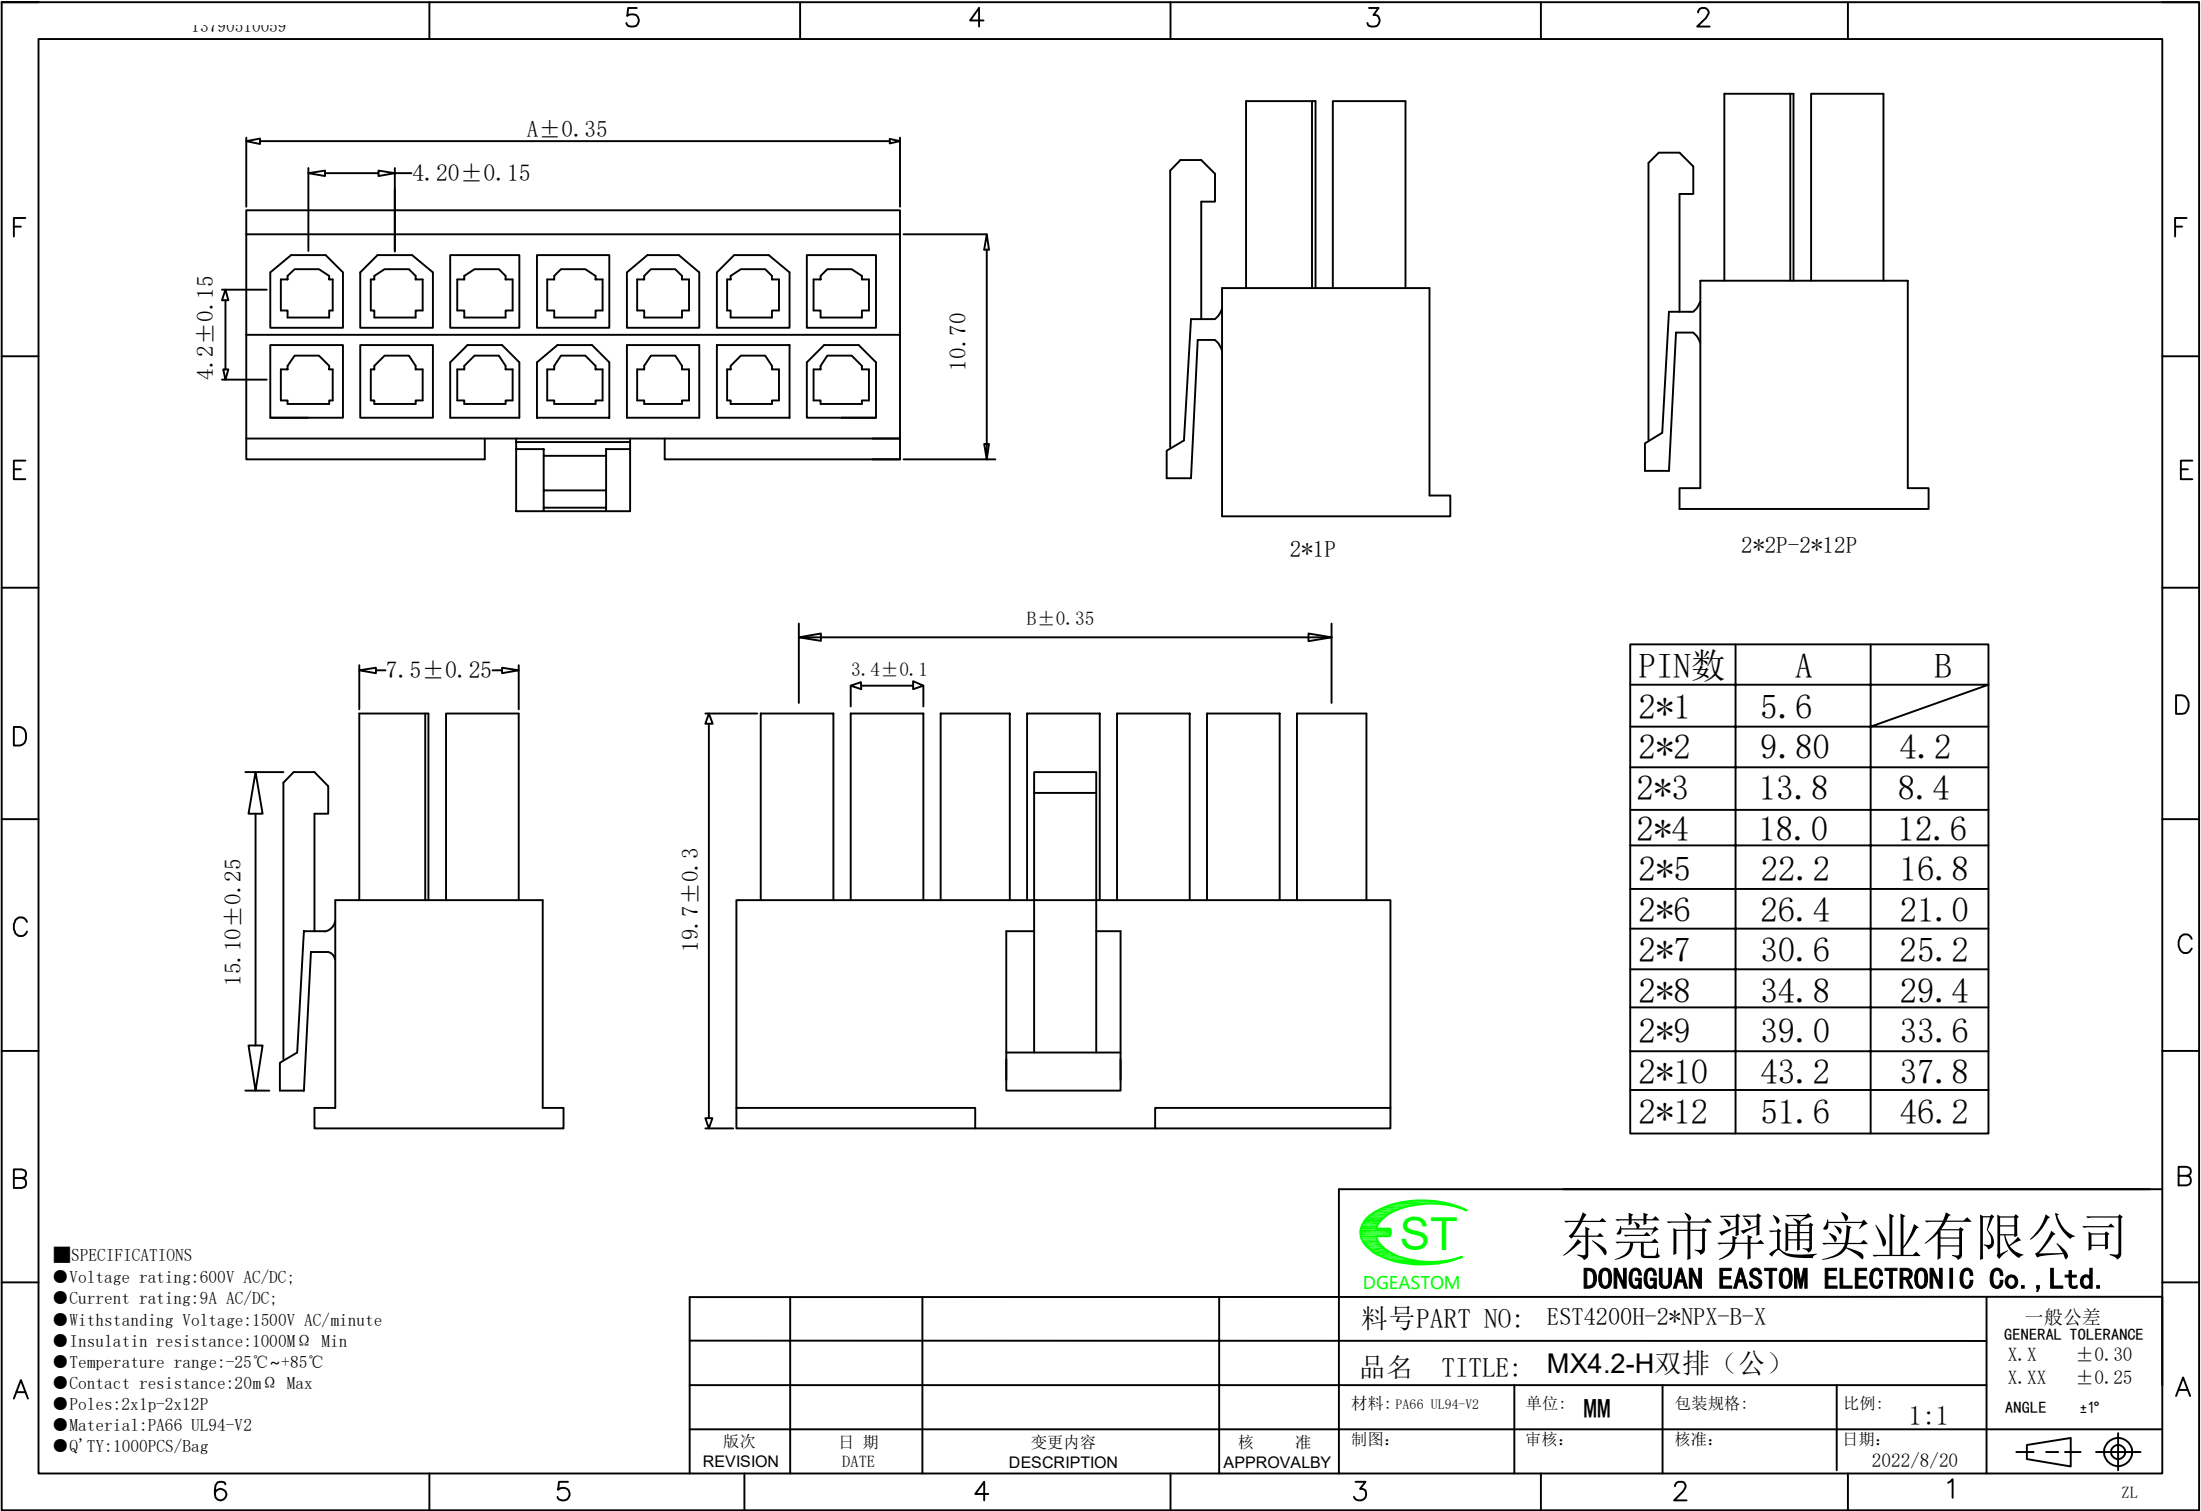

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST4200H-2*NPX-B-X			
品名 TITLE: MX4.2-H双排 (公)			
材料: PA66 UL94-V2	单位: MM	包装规格:	比例: 1:1
制图:	审核:	核准:	日期: 2022/8/20

一般公差 GENERAL TOLERANCE	
X.X	±0.30
X.XX	±0.25
ANGLE	±1°



ZL