

13790510059





5

4


3

2

1

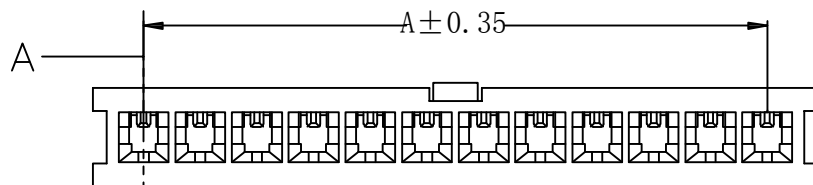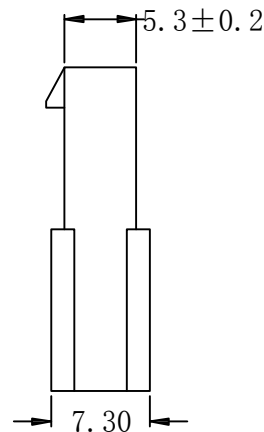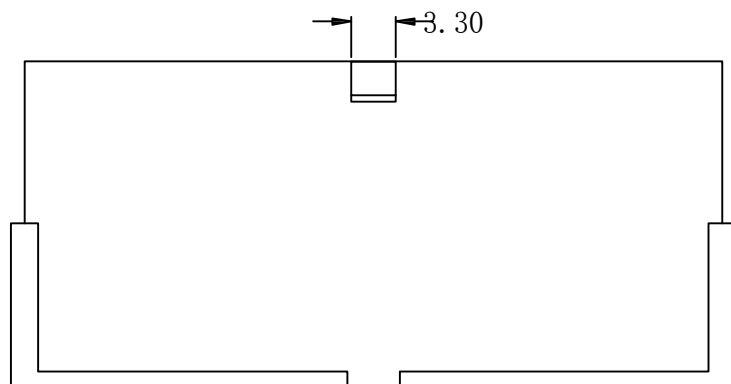

SECTION A-A

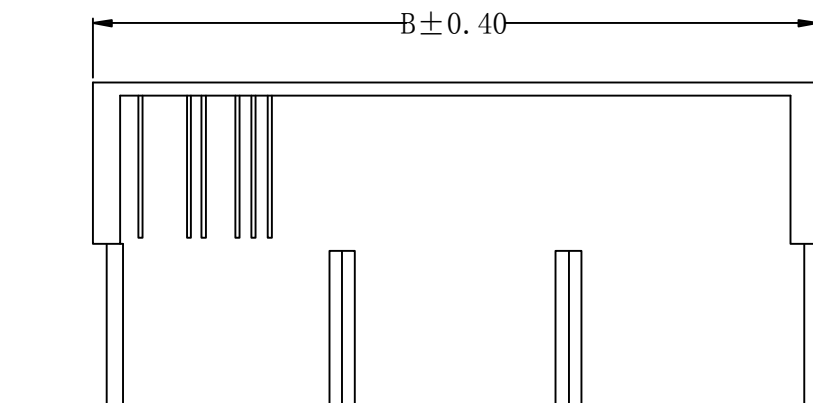

Model No.	Dimensions(mm)	
	A	B
2P	4.2	11.7
3P	8.4	15.9
4P	12.6	20.1
5P	16.8	24.3
6P	21.0	28.5
7P	25.2	32.7
8P	29.4	36.9
9P	33.6	41.1
10P	37.8	45.3
11P	42.0	49.5
12P	46.2	53.7

EST4201 H - 1*NP X - B - X - HF-NK - X

↑ 羿通代码+间距 ↑ PIN数 ↑ X本色 ↑ X普通 ↑ X公胶壳 ↑ NO MARK ↑ A灼热丝750 ↑ B灼热丝850 ↑ X普通料

↑ 1示意单排 ↑ 2示意双排 ↑ C剥破 ↑ 2L示意两侧带锁扣 ↑ U超薄F防呆型 ↑ HV带高凸点 ↑ LC带低凸点 ↑ K卡槽 ↑ E有耳 ↑ HF示意无卤 ↑ NF普通含卤

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

SPECIFICATIONS

- Voltage rating: 600V AC/DC;
- Current rating: 9A AC/DC;
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃ ~ +85℃
- Contact resistance: 10mΩ Max
- Mates With MX4.2 Series wafer

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

		东莞市羿通实业有限公司 DONGGUAN EASTOM ELECTRONIC Co., Ltd.	
料号PART NO: EST4201H-1*NPX-X-G		品名 TITLE: MX4.2-H母(无耳)	
材料:	单位: MM	包装规格:	比例: 1:1
制图:	审核:	核准:	日期: 2022.7.19
		一般公差 GENERAL TOLERANCE X. X ±0.25 X. XX ±0.20 ANGLE ±1°	

