

13790510059

5

4

3

2

F








E

D

C

B

A

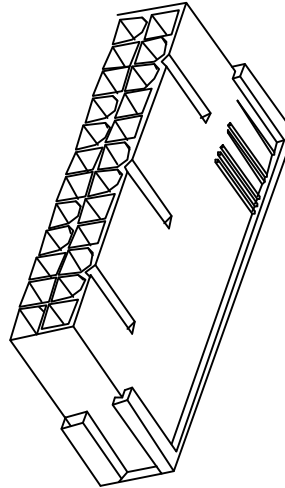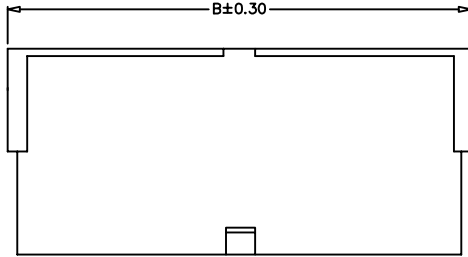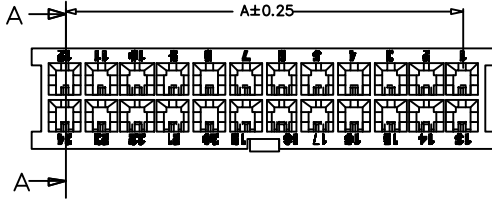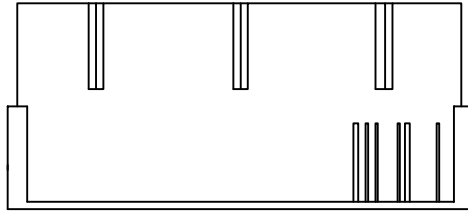

MODEL NO	Dimensions (mm)	
	A	B
2*1	4.2	7.5
2*2		11.7
2*3	8.4	15.9
2*4	12.6	20.1
2*5	16.8	24.3
2*6	21.0	28.6
2*7	25.2	32.7
2*8	29.4	36.9
2*9	33.6	41.1
2*10	37.8	45.3
2*11	42.0	46.5
2*12	46.2	53.7

- SPECIFICATIONS
- Voltage rating: 600V AC/DC;
 - Current rating: 9A AC/DC;
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ Min
 - Temperature range: -25℃~+85℃
 - Contact resistance: 20mΩ Max
 - Poles: 2x1p-2x12P
 - Material: PA66 UL94-V2
 - Q' TY: 1000PCS/Bag

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

 东莞市羿通实业有限公司 DONGGUAN EASTOM ELECTRONIC Co., Ltd.			
料号PART NO: EST4200H-2*NPB-B-G			
品名 TITLE: MX4.2-H双排(无耳)			
材料: PA66 UL94-V2	单位: MM	包装规格:	比例: 1:1
制图:	审核:	核准:	日期: 2022/8/20
			一般公差 GENERAL TOLERANCE X.X ±0.15 X.XX ±0.05 ANGLE ±1°

6

5

4

3

2

1

ZL