

13790510059

5

4

3

2

F

F

E

E

D

D

C







C

B

B

A

A

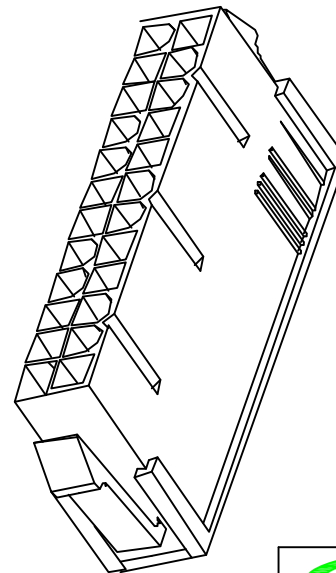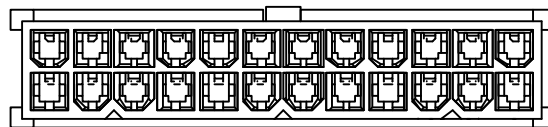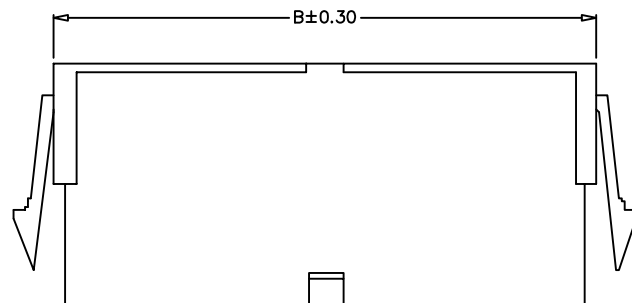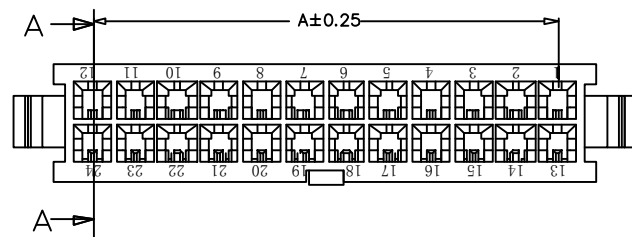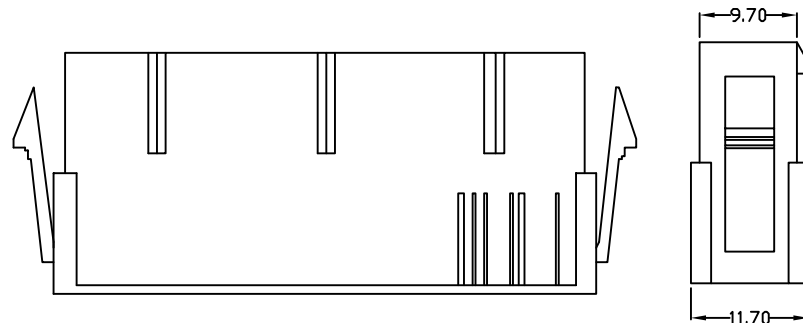

MODEL NO	A	B
2*1		7.5
2*2	4.2	11.7
2*3	8.4	15.9
2*4	12.6	20.1
2*5	16.8	24.3
2*6	21.0	28.6
2*7	25.2	32.7
2*8	29.4	36.9
2*9	33.6	41.1
2*10	37.8	45.3
2*11	42.0	49.5
2*12	46.2	53.7

■SPECIFICATIONS

- Voltage rating:600V AC/DC;
- Current rating:9A AC/DC;
- Withstanding Voltage:1500V AC/minute
- Insulation resistance:1000MΩ Min
- Temperature range:-25℃~+85℃
- Contact resistance:20mΩ Max
- Poles:2x1p-2x12P
- Material:PA66 UL94-V2
- Q' TY:1000PCS/Bag

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST4200H-2*NPB-E-G

品名 TITLE: MX4.2-H双排(有耳)

材料: PA66 UL94-V2

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2022/12/25

一般公差
GENERAL TOLERANCE
X.X ±0.35
X.XX ±0.25
ANGLE ±1°



ZL