

13/90510059

5

4

3

2

F

F

E

E

D

D

C




C

B


B

A

A

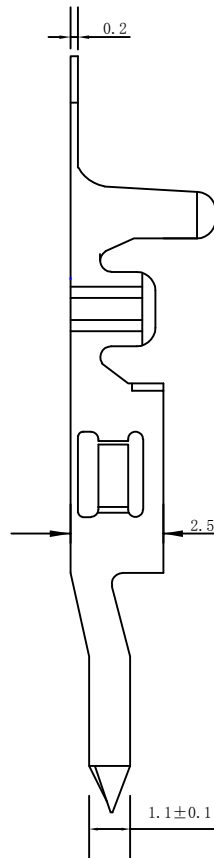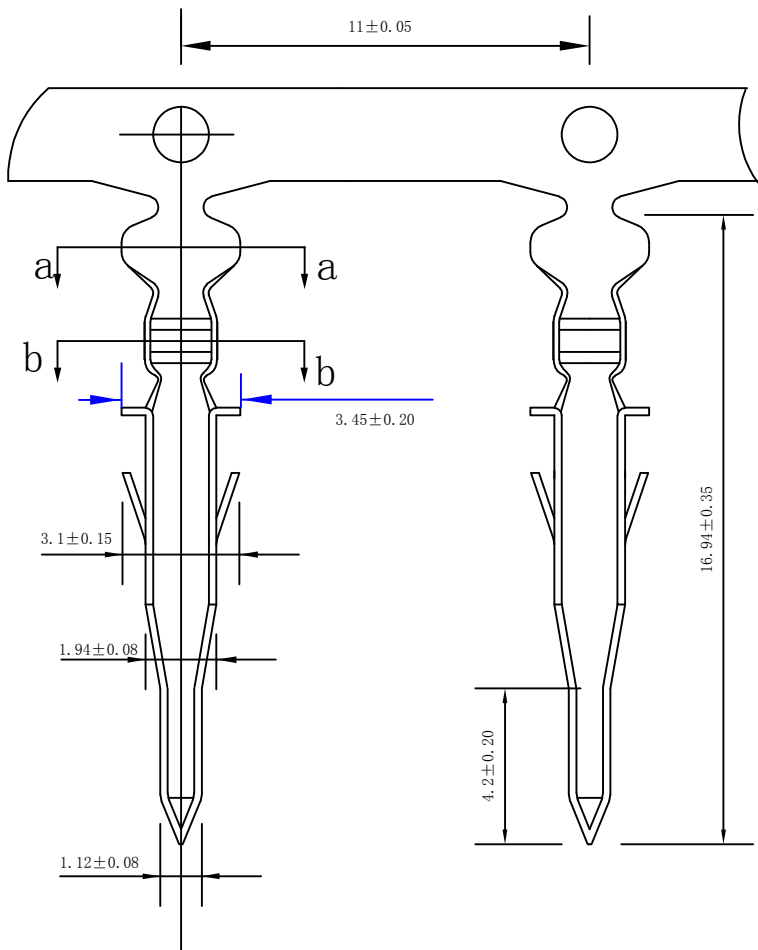

SECTION a-a



SECTION b-b

EST4201 T P X - 2 X- X

↑ 异通代码+间距
↑ T示意端子
↑ P磷铜
↑ B黄铜
↑ E合金铜
↑ X普通脚
↑ H高脚
↑ E增高型脚
↑ 0素材
↑ 2镀锡先冲后镀
↑ 3镀锡先镀后冲
↑ 4镀全镍(镀后冲)
↑ 4.2镀全镍先冲后镀
↑ 5G、15G示意镀金5U"或15U", 1G示意镀金1U"

↑ K公差
↑ G母端
↑ C示意90°
↑ S示意180°

技术参数:SPECIFICATIONS

- 适用线规: AWG#18-#26
Applicable wire:AWG#18~#26
- 额定电压: 250V DC/AC (有效值)
Voltage rating: 250V DC/AC (rms)
- 额定电流: 9.0A
Current rating:9.0A
- 耐压值: 800V AC(有效值)
Withstand voltage: 800V AC(rms)
- 工作温度: -25℃~+85℃
Working Temperature:-25℃+85℃
- 绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
- 接触电阻: ≤0.02Ω
Contact resistance:≤0.02Ω



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST4201TPX-2X-X

品名 TITLE: 5559 - T

材料: C5191

单位: MM

包装规格: 5K/卷

比例: 1:1


制图: LI

审核: LI

核准: LI

日期: 2022/5/4

一般公差
GENERAL TOLERANCE
X. X ±0.35
X. XX ±0.25
ANGLE ±1°



EST

日期版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY