

13790510059

5

4

3

2

F




E

D

C

B

A

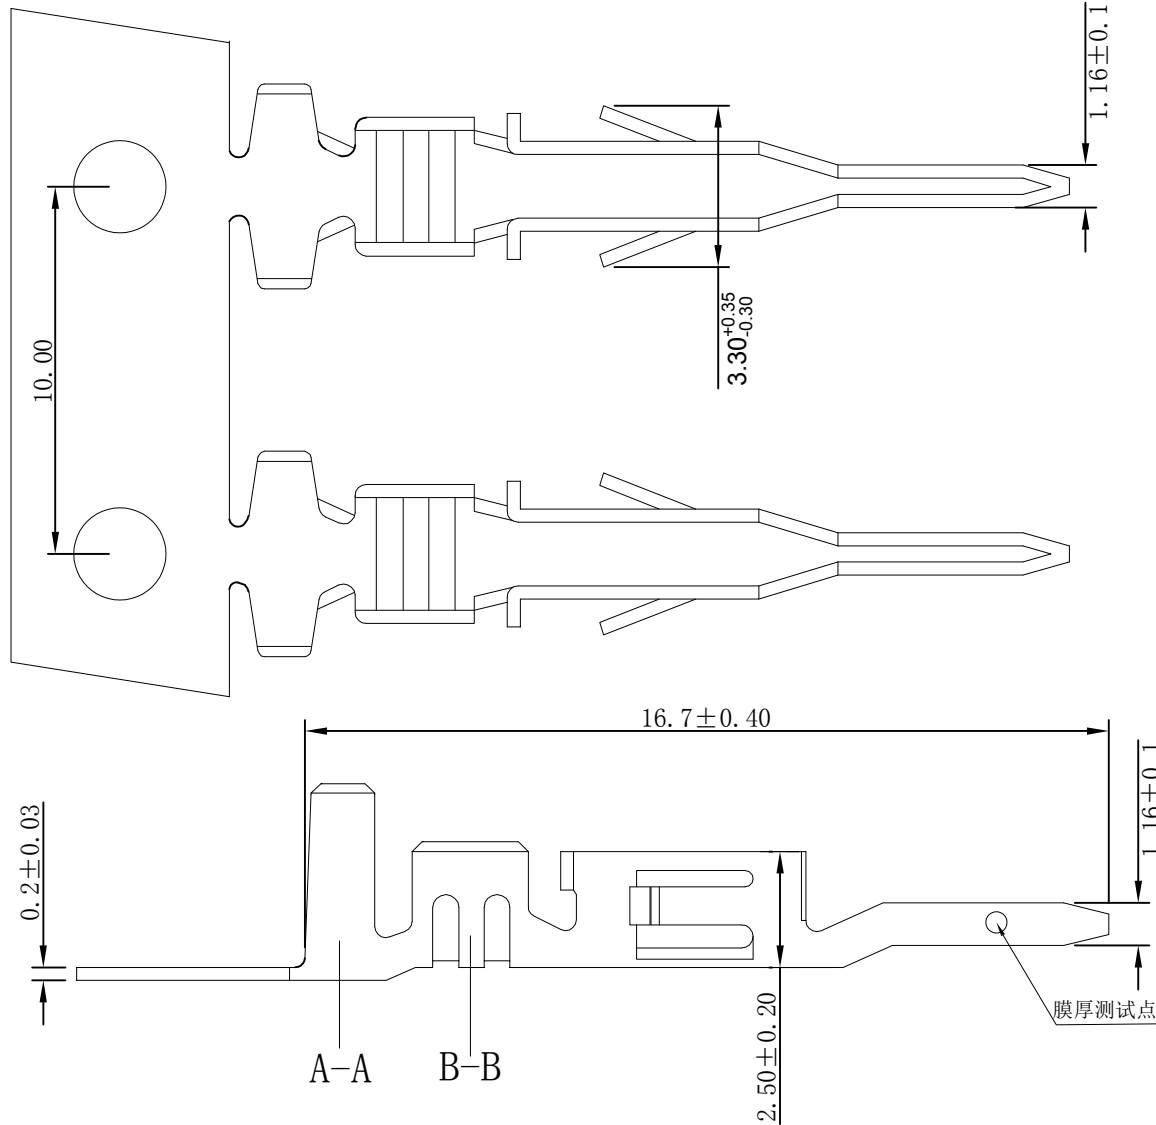

EST4201 T P H - 2 X - X

↑ ↑ ↑ ↑ ↑

开通代码+间距 T示意端子 X普通脚 H高脚 E增高型脚 0素材 2镀锡先冲后镀 3镀锡先镀后冲 4镀全镍(镀后冲) 5G、15G示意镀金50"或15U", 16示意镀金1U"

X公端
G母端
C示意90°
S示意180°

P磷铜
B黄铜
E合金铜

SPECIFICATIONS

- Applicable wire:AWG#16~#22
- Voltage rating: 250V DC/AC (rms)
- Current rating**9.0A**
- Withstand voltage: 800V AC(rms)
- Working Temperature:-25℃+85℃
- Lnsulation resistance:≥1000MΩ
- Contact resistance:≤0.02Ω
- Surface preparation:Ni(20-60U"),Sn(60-120U")

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST4201TPH-2X-X

品名 TITLE: 5559 - T(高)

材料: C5191

单位: MM

包装规格: 5K/卷

比例: 1:1


制图: LI

审核: LI

核准: LI

日期: 2024/11/06

一般公差
GENERAL TOLERANCE
X. X ±0.35
X. XX ±0.25
ANGLE ±1°



ZX