

13790510059




5

4




3

2

1

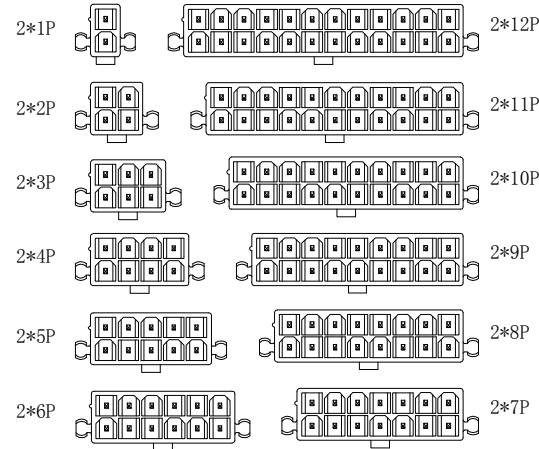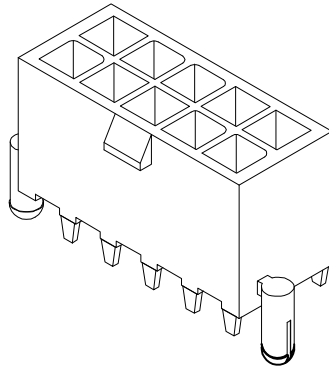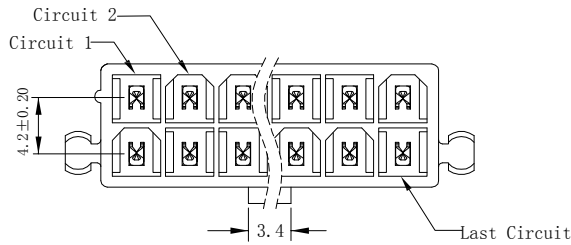

CIRCUIT SIZE LAYOUT

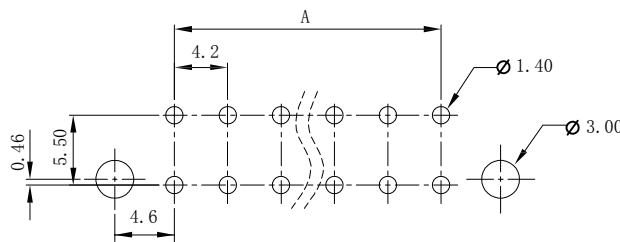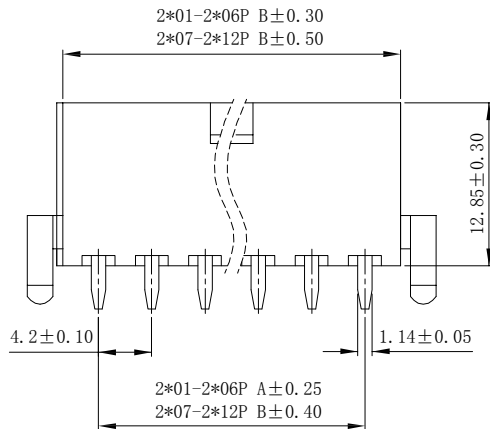

P. C. B LAYOUT

PIN数	A	B
2*1	/	5.6
2*2	4.2	9.8
2*3	8.4	14.0
2*4	12.6	18.2
2*5	16.8	22.4
2*6	21.0	26.6
2*7	25.2	30.8
2*8	29.4	35.0
2*9	33.6	39.2
2*10	37.8	43.4
2*11	42.0	47.6
2*12	46.2	51.8

EST4200 W R - 2*NP X - 2 - X X - NK-HF

↑ 昇通代码+间距 ↑ PIN数 ↑ X本色 ↑ X普通 ↑ G为PIN针镀金 ↑ HF无卤

1单排 2双排 B黑色 U超薄 S为PIN针镀锡 NF普通含卤

R红色 PH组合排针 1为PPS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T, 6为PA66

L蓝色 FH组合排母 2示意有柱

Y黄色 高弯 KLO带定位打K

G绿色 R打脚 D防呆型 2示意有柱

V示意180°直针, VS立式 R示意90°弯针, RS卧式 LG高弯

W示意针座 W后无0默认材质为V0 W后带2示意V2

SPECIFICATIONS

- Voltage rating: 500V AC/DC;
- Current rating: 7A AC/DC;
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃ ~ +85℃
- Contact resistance: 20mΩ Max

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY

东莞市昇通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST4200WR-2*NPX-2				一般公差 GENERAL TOLERANCE	
品名 TITLE: MX4.2直针双排带柱				X. X ±0.25	
材料:		单位: MM	包装规格:	X. XX ±0.20	
制图:		审核:	核准:	ANGLE ±1°	
日期: 2022/08/22					

6

5

4

3

2

1

XY