




■ SPECIFICATIONS

- Voltage rating: 600V AC/DC;
- Current rating: 7A AC/DC;
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 30mΩ Max
- Material: PA66 UL94-V0/V2

版次	日期	变更内容	核 准
REVISION	DATE	DESCRIPTION	APPROVALBY

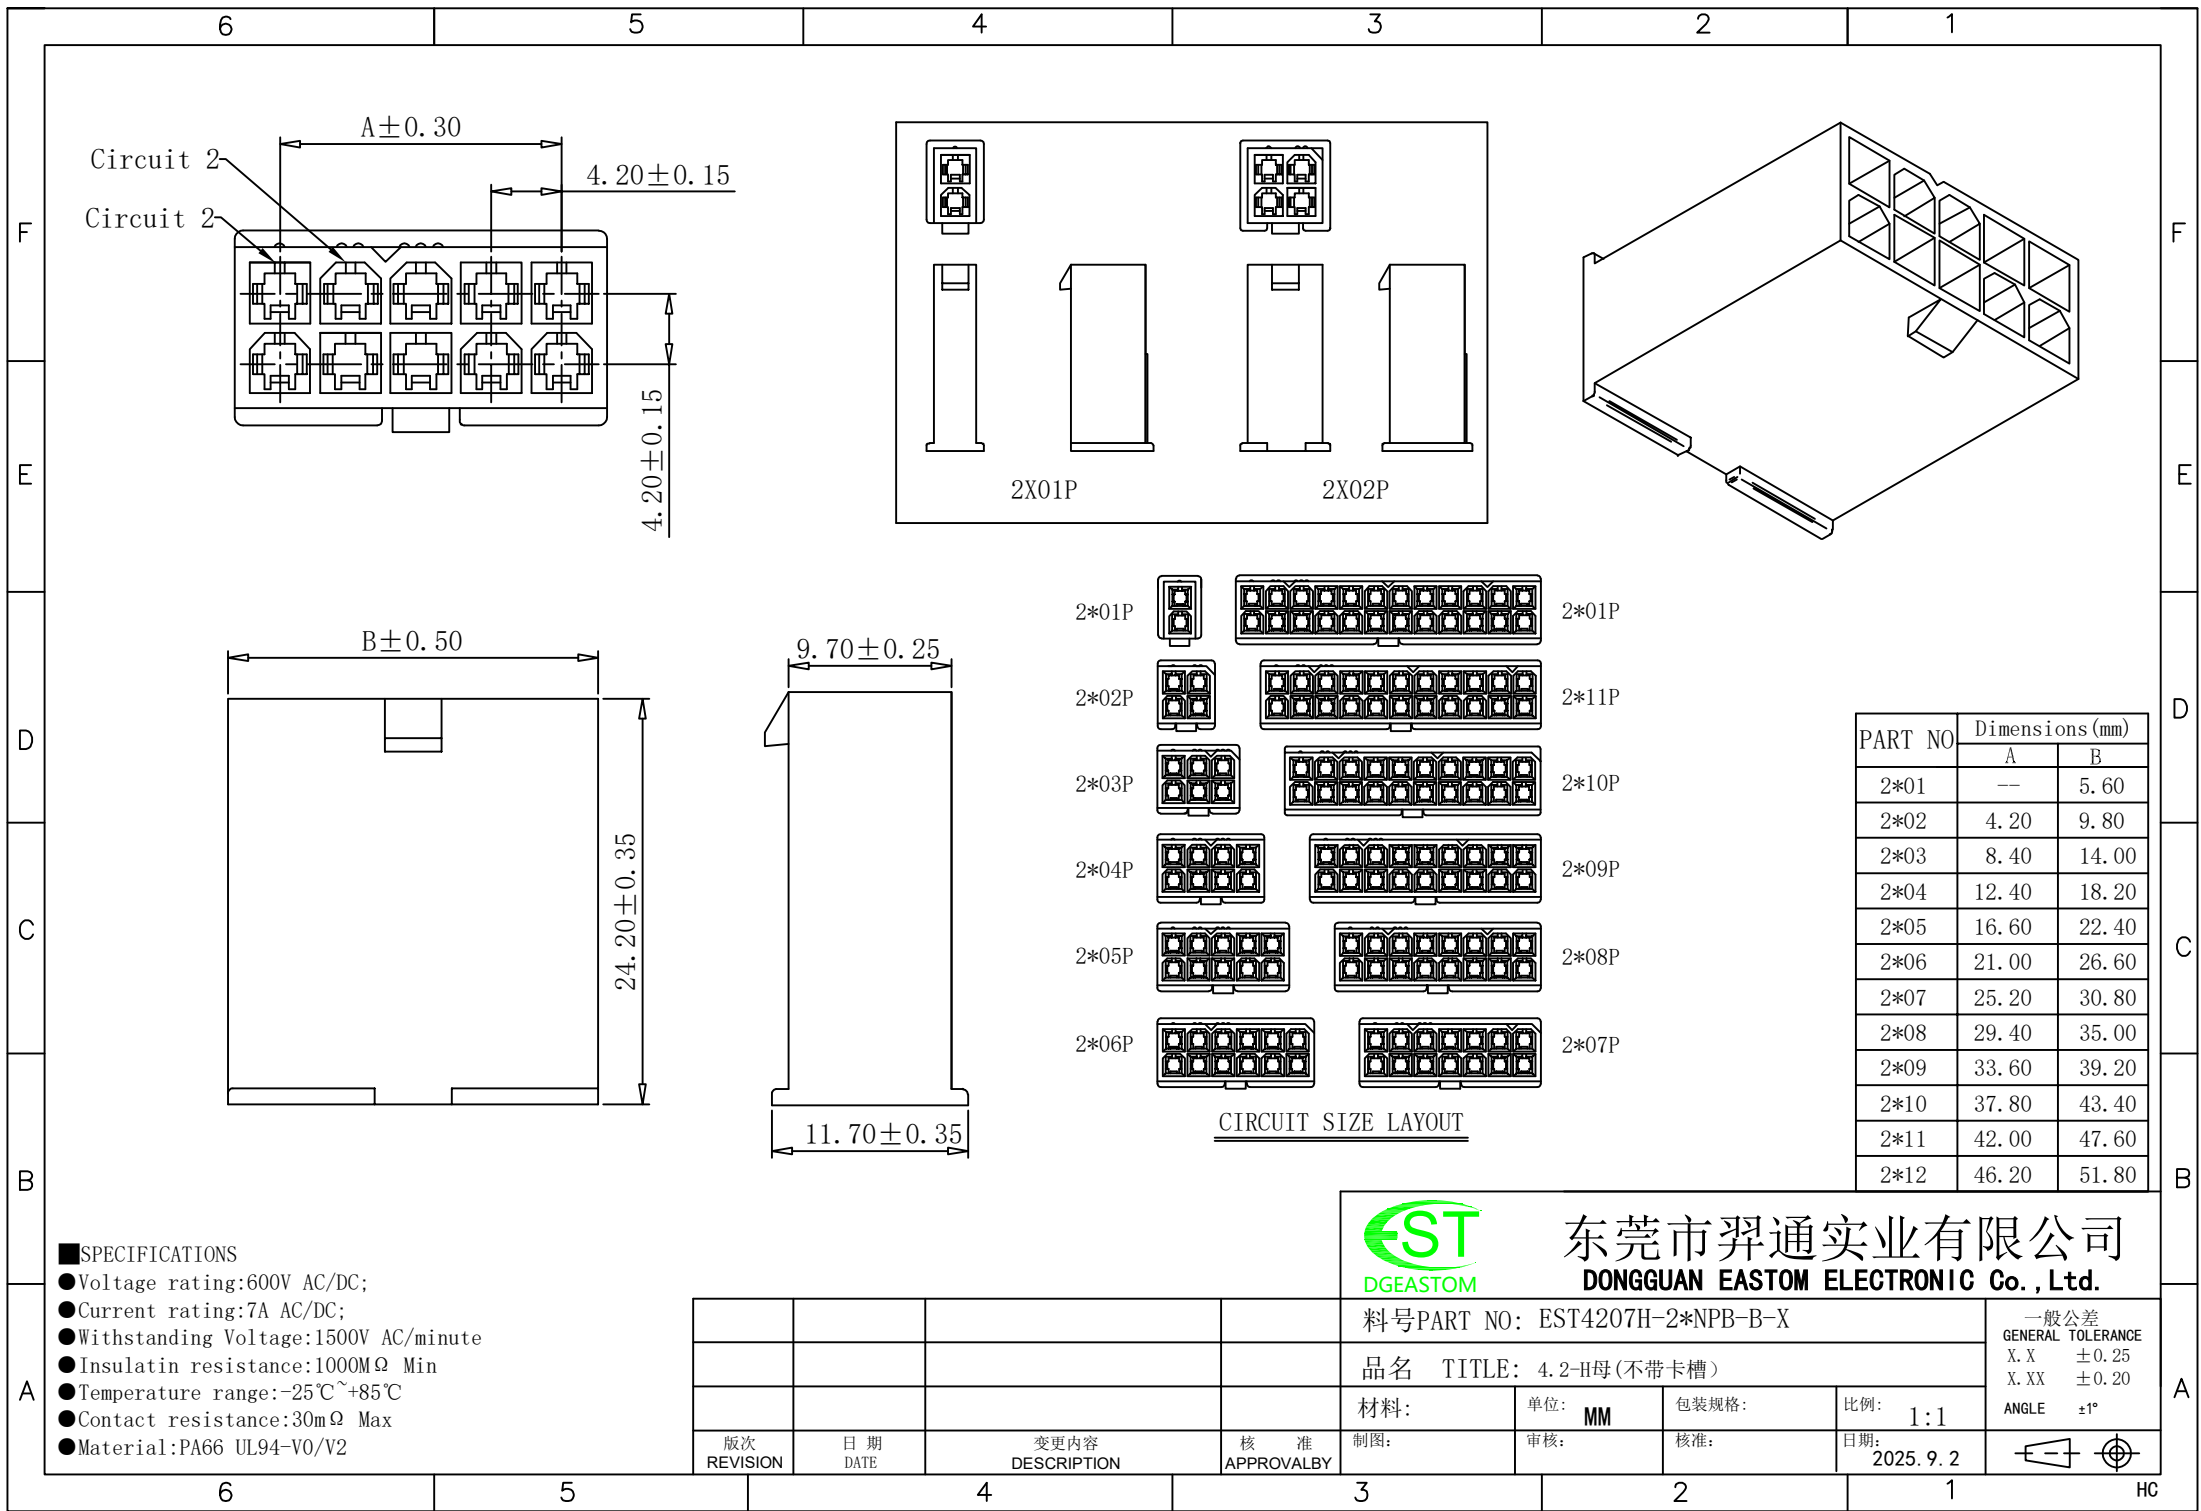

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST4207H-2*NPB-B-X

品名 TITLE: 4.2H母(不带卡槽)

材料:

单位:

MM

包装规格:

比例:

1:1

制图:


审核:

核准:

日期:

2025. 9. 2

一般公差
GENERAL TOLERANCE
X. X ±0.25
X. XX ±0.20
ANGLE ±1°



HC