

F

E

D

C

B

A

F




E

D

C

B

A

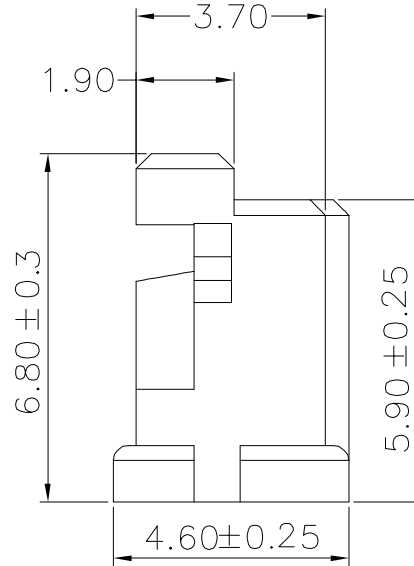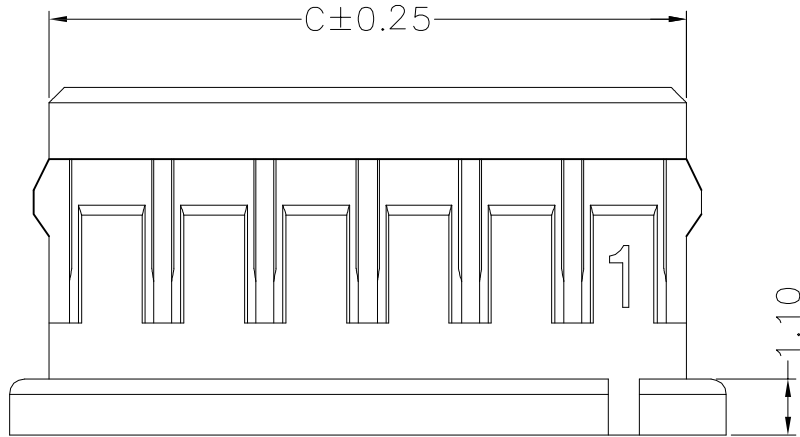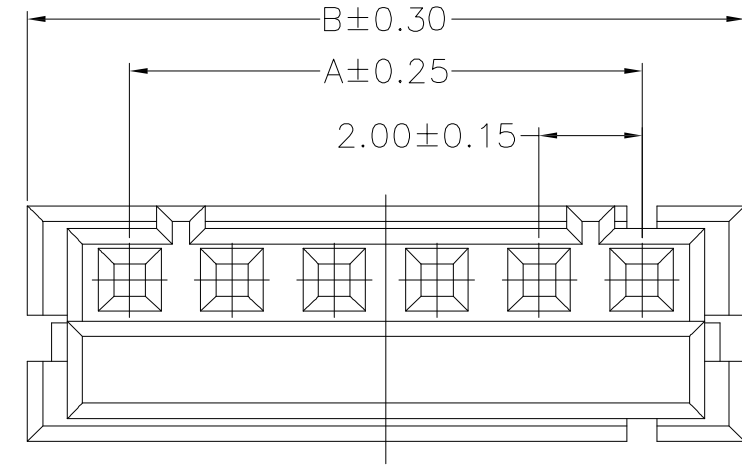

POLES	DIMENSION(mm)		
	A	B	C
2	2.00	6.00	4.45
3	4.00	8.00	6.45
4	6.00	10.00	8.45
5	8.00	12.00	10.45
6	10.00	14.00	12.45
7	12.00	16.00	14.45
8	14.00	18.00	16.45
9	16.00	20.00	18.45
10	18.00	22.00	20.45
11	20.00	24.00	22.45
12	22.00	26.00	24.45
13	24.00	28.00	26.45
14	26.00	30.00	28.45
15	28.00	32.00	30.45

EST2039 H - 1*NP X - B - X - HF-NK - X

↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑

↑ 羿通代码+间距

↑ X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明

↑ X普通
B带扣
C刺破
2L示意两侧带锁扣
U超薄F防呆型
HV带高凸点
LC带低凸点,
K卡槽
E有耳

↑ X公胶壳
G母胶壳

↑ NO MARK

↑ HF示意无卤
NF普通含卤

↑ A灼热丝750
B灼热丝850
X普通料

PIN数
1示意单排
2示意双排

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating: 3A AC/DC (AWG#22&AWG#24)
- Withstanding Voltage:650V AC/minute
- Insulation resistance:1000M Min.
- Temperature range:-55°C - +85°C
- Contact resistance:30m Max.

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY




东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2039H-1*NPX-X-X

品名 TITLE: DF3-H

材料:	单位: MM	包装规格:	比例: 1:1
制图:	审核:	核准:	日期: 2024. 4. 12

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.20
ANGLE ±1°



XDYT